

The *SealMaster*® **Advantage**

**PAVEMENT
MAINTENANCE
SOLUTIONS**

www.sealmaster.net

SealMaster®

Pavement Products & Equipment

MAINTAINING THE WORLD'S PAVEMENT

A TRADITION OF QUALITY & INNOVATION...

For over 40 years, property owners and government agencies have turned to SealMaster for innovative, cost-effective pavement maintenance solutions. SealMaster products are designed to repair, protect and beautify pavement, greatly enhancing your property's curb appeal. SealMaster continues to be an industry innovator with over one billion gallons of pavement sealer applied world-wide.

PROFESSIONAL SERVICE...

SealMaster has the industry's largest network of professionally trained pavement maintenance contractors to assure successful results at competitive prices. Our network of highly trained and experienced professionals are available to provide on-site project recommendations as well as full application services to assure quality results on every project.

A GLOBAL LEADER...

With over 65 Manufacturing and Distribution centers coast to coast along with manufacturing and product distribution in over 50 countries, SealMaster continues to be a global leader in pavement maintenance. SealMaster's unparalleled record of technological advances in both product and application equipment continues to set us apart as a true industry leader.

(800) 395-7325
sealmaster.net

Copyright © SealMaster 2013
Form No: SM-230




The *SealMaster*® Advantage

THE SMART
CHOICE FOR
**PAVEMENT
PRESERVATION**



Your Pavement Is The Welcome Mat To Your Property. Does it project a neat, professional image? Or does it portray a drab, run-down image? SealMaster provides the best solutions for beautifying and protecting your asphalt pavement investment. With over One Billion gallons of pavement sealer applied world-wide, SealMaster continues to be the number one choice for pavement maintenance among property owners and quality pavement professionals.

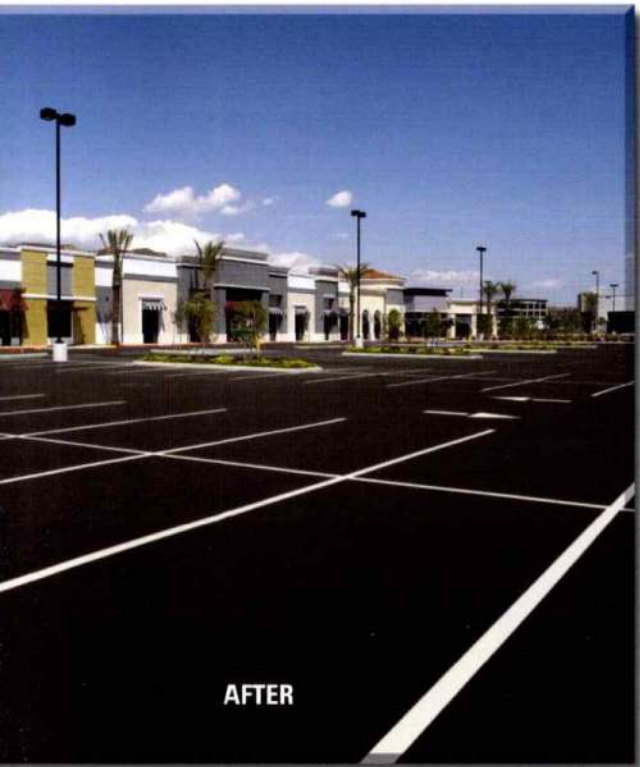

A Scheduled Program Of Pavement Maintenance Beautifies And Protects Asphalt Pavement For A Fraction Of The Cost of Overlaying With New Asphalt.

Left untreated, asphalt pavement will deteriorate rapidly. The asphalt binder that holds the pavement together begins to oxidize and weather soon after installation. Moisture penetrates the asphalt causing further damage and deterioration to the pavement.

SealMaster pavement sealers are designed to replenish the binder that is lost through weathering and aging, and provide superior protection against environmental distress.

A pavement maintenance program that includes periodic sealcoating and crack filling will more than double the service life of asphalt pavement.



A Nationally Recognized Brand

Our national product manufacturing and distribution facilities allow us to serve thousands of property owners and pavement maintenance professionals year after year from coast to coast. We're the only brand of sealer that's available nationwide, so you can enjoy consistent, quality results from a name you can trust.



NUVO^{CS}

The workhorse of the Nuvo line, CS materials provide consistent results in a wide range of climates. A perfect mix of convenience and performance, Nuvo CS has raised the bar for what a hot pour crack sealant should be.

Very Cold Cold Moderate Hot Very Hot

Formulation A

Formulation B

Formulation C

Formulation D

Bergen inc.

32 years in asphalt contracting business with 13 full-time crews.

"Nuvo products are premium sealants that our customers love and our crews love to use. Maxwell Products has been great to work with and has been a big part of our success."

NUVO^{Elite}

With exceptional performance and value, Nuvo Elite sealants are in a class of their own. Formulated from the finest raw materials, they offer the greatest range of benefits and versatility available from any hot pour crack sealant.

Very Cold Cold Moderate Hot Very Hot

Formulation A

Formulation B

Formulation C

Formulation D

"We couldn't believe the results that we were seeing, Nuvo out performed all of our expectations and continues to perform years later. When you weigh out the performance, in my opinion it's the best deal out there."

Rick Hoium

Highway Maintenance Supervisor - Otter Tail County, MN



MAXWELLPRODUCTS.COM




NEXT GENERATION CRACK SEALANTS.

Nuvo hot-pour crack sealants are continuously formulated with the latest advancements in sealant technology, such as Intelibond and PolySkin packaging. With features like superior crack penetration, quick setup times, wide application temperature ranges, and fast melt times, Nuvo sealants are focused on excellent performance and complete customer satisfaction.



MAXWELL PRODUCTS
PAVEMENT MAINTENANCE SOLUTIONS

NUVO™ | CS C



Nuvo CS C is a next generation hot applied polymer modified asphalt crack sealant. This sealant applies and sets up best in up to hot temperatures, and is highly durable in cold to very hot climates. With advanced performance provided by Intelibond Technology, Nuvo CS C is self leveling, fast setting and moderately stiff for parking lot applications. Formulated with a low viscosity for maximum crack penetration, it is ideal for highways, county roads, municipal streets, parking lots, airports and pathways. Nuvo CS C delivers high performance at a moderate cost.

SPECIFICATION

CONE PENETRATION : 77°F (25°C); 150g, 5s : ASTM D5329	45 dmm max
SOFTENING POINT : ASTM D36	205°F (96°C) min
FLEXIBILITY : 1 in (25mm) mandrel, 90 deg bend, 2s : ASTM D3111	Pass 20°F (-7°C)
TENSILE ADHESION : 77°F (25°C) : ASTM D5329	500% min.
DUCTILITY : 77°F (25°C) : ASTM D113	40 cm min
FLOW : 140°F (60°C) : ASTM D5329	3 mm max
RESILIENCE : 77°F (25°C) : ASTM D5329	30% min

APPLICATION

Read and follow application instructions before use. This product must be heated using indirect heating methods, either a double boiler or hot oil circulating kettle. Equipment must have means of maintaining constant agitation to the material. Maximum safe heating temperature: 400°F (204°C). Recommended application temperature: 380°F (193°C).

WARRANTY

Maxwell Products, Inc. warrants that our products meet the applicable specifications at the time of shipment. Due to the many differing procedures used in preparing and installing materials, Maxwell Products assumes no liability for material failure due to improper installation, equipment failure or operator errors. Any remedies are limited, at Maxwell Products' option, to replacement of materials or refund (full or partial) of the purchase price from Maxwell Products. Claims must be made within three (3) months of the date of purchase. There is no other warranty either expressed or implied.



● Performance Range
⏸ Suggested Max. Application Temp

Available in:

PolySkin 
Inclusive packaging

Formulated with:

inteliBond™
TECHNOLOGY

Maxwell
PRODUCTS INCORPORATED

Salt Lake City,
Toll Free - 800.266.2090
Fax - 800.266.2090

Generated April 13, 2015.

Please visit <http://maxwellproducts.com> for an updated version.